



# BoostFeeder

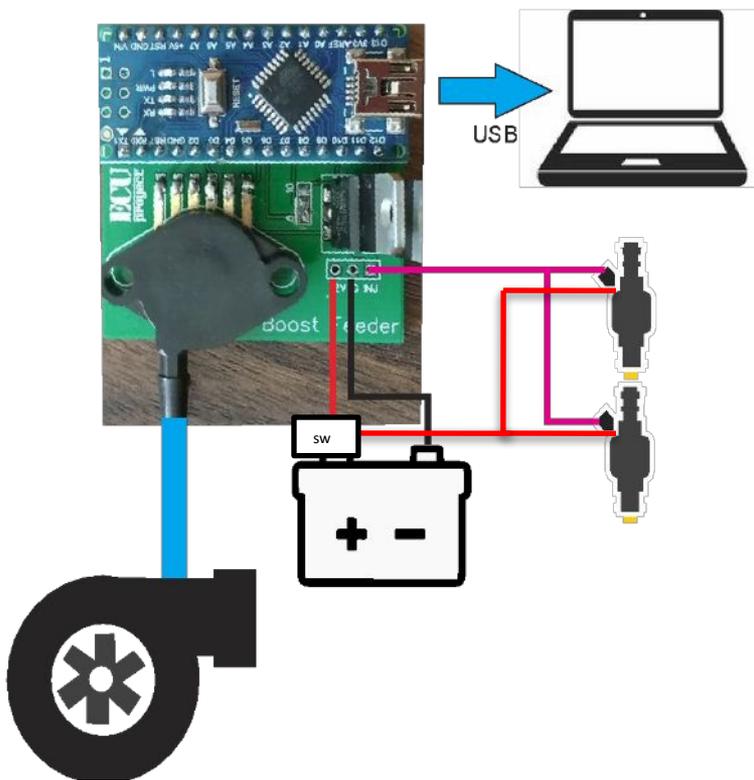

Output Curve Example: A = 1PSI B = 10PSI

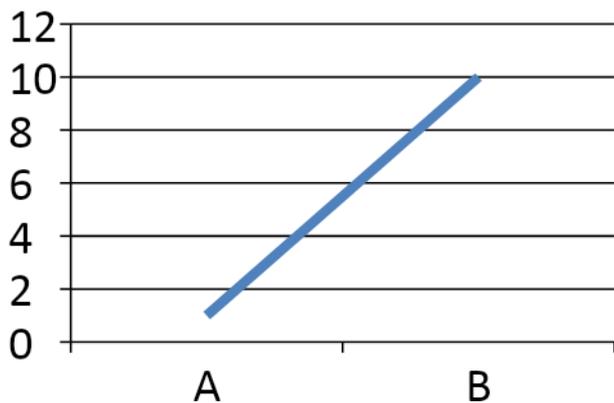

## Instructions:

Install USB driver (CH340g) you can download it from [proyectecu.com/en/descargas/](http://proyectecu.com/en/descargas/)



Connect USB to laptop  
Connect to TunerStudio using tutorial “How to connect to modules using Tunerstudio”




Tutorial at [proyectecu.com/en/descargas/](http://proyectecu.com/en/descargas/)

It is also possible to use any terminal such as: Terminte.exe


DIODE MOD

MAP signal



Ground

# BoostFeeder

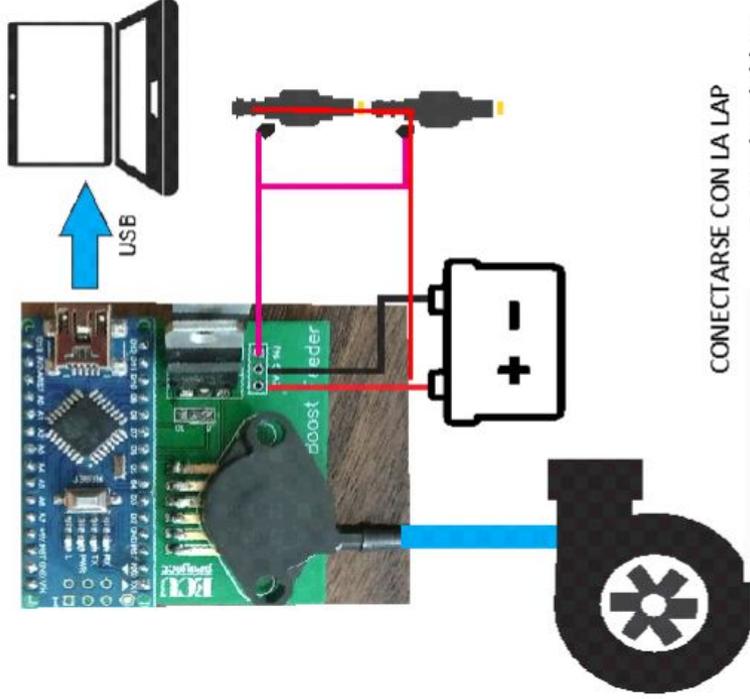

Old Guide (as reference)

## CONECTARSE CON LA LAP

1. Instalar el driver
2. Conectar el boost feeder usando el cable USB
3. Abrir Termite
4. Seleccionar boton Settings



Driver.EXE



Termite.exe



Termite.ini

5. En el menu Port, seleccionar COM de la lista (puede variar)
6. Seleccionar Baud rate de 115200
7. Dar click en OK

